


# SPECIAL VAPORIZER

A vaporizer can be heated via the heating elements in the vaporizer water chamber. The heated water provides the energy that is required to maintain the gaseous state of the liquefied gas. It features preventing overflow of liquefied gas.

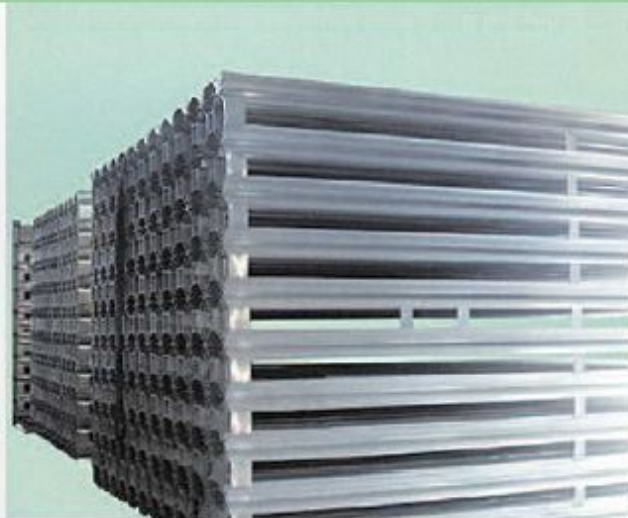

## ■ SPECIFICATION

	ELECTRIC VAPORIZER	CONVECTIONAL VAPORIZER	ELECTRIC VAPORIZER
MATERIAL	SUS304TP	A6063 T5 (Aluminum)	Internal Pressure(Coil):SUS304TP
FLUID	LPG	LNG, L-N <sub>2</sub> , L-AR, L-O <sub>2</sub> , L-CO <sub>2</sub>	NH <sub>3</sub>
PRESSURE	1.0 ~ 1.8 Mpa	1.0 ~ 2.0 Mpa	1.0 ~ 2.2 Mpa
TEMP.	-5 ~ 100℃	-196 ~ 40℃	-20 ~ 180℃
CAPACITY	30/50/100/150/200 300/400/500 kg/hr	10 ~ 10,000 m <sup>3</sup> /hr	50 ~ 500 kg/hr