


# ANGLE TYPE BALL CHECK VALVE

WBCV-1126 (LPG)  
WBCV-1226 (NH<sub>3</sub>)

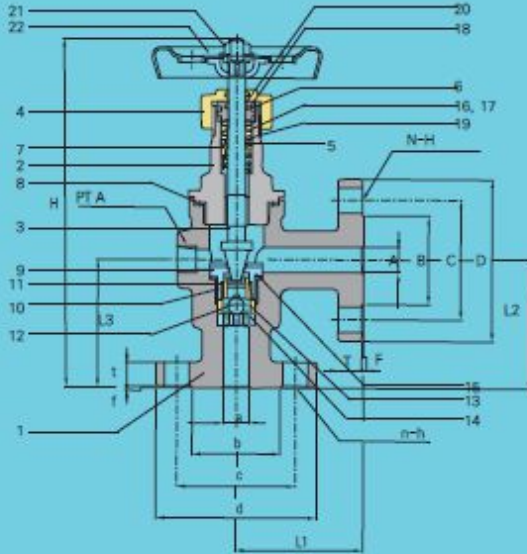

## MATERIAL

NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL
1	BODY	GCD-S	12	BALL	STS 304
2	BONNET	S20C	13	COLLAR	C3604B
3	SPINDLE	STS 304	14	BALL REST	C3604B
4	GLAND NUT	S20C	15	PACKING	P.T.F.E
5	PACKING GLAND	C3604B	16	V-PACKING	P.T.F.E
6	GLAND	C3604B	17	V-PACKING	P.T.F.E
7	SPRING	STS 304	18	O-RING	N.B.R
8	GASKET	NON-ASBESTOS	19	O-RING	N.B.R
9	VALVE DISK	C3604B	20	O-RING	N.B.R
10	VALVE SEAT	C3604B	21	NUT	S25C
11	PACKING	P.T.F.E	22	HANDLE	SPCC

## SPECIFICATION

- Application : to prevent the gas leakage in tank when klinger type level gauge was destroyed.
- Hydrostatic test pressure : 2.94MPa
- Pneumatic test pressure : 1.96MPa
- Maximum working pressure : 1.96MPa
- Fluid : LPG, NG, NH<sub>3</sub>

## DIMENSION

unit : mm

SIZE	H	L1	L2	L3	PT A	INLET FLANGE							OUTLET FLANGE						
						a	b	c	d	t	f	n-øh	A	B	C	D	T	F	n-øh
15A	205	75	75	75	PT1/2	15	52	70	95	14	1	4-14	15	52	70	95	14	1	4-14

### 참고\_Remark

1. 암모니아용일 경우 일부 재질을 변경함. \_ 1. Material is to be changed in case of NH<sub>3</sub>
2. 다른 가스 용도로 사용할 경우 당사로 연락바람. \_ 2. Please contact us when applying for other gasses