


20KG/CM² FLANGED CHECK VALVE

WCV-1121 (LPG)
WCV-1221 (NH₃)

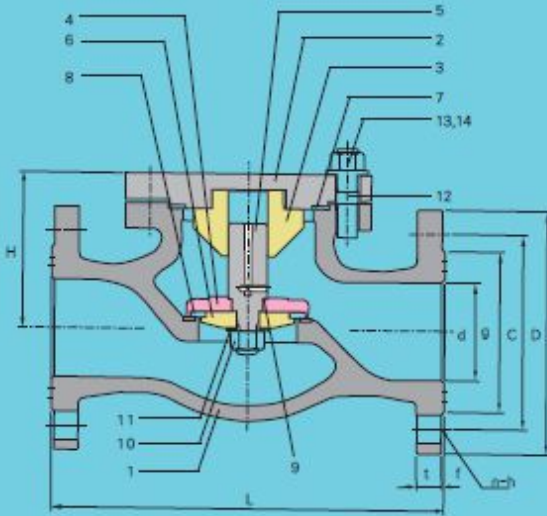

■ MATERIAL

NO.	PART NAME	MATERIAL
1	BODY	GCD-S
2	CAP	SS41
3	GUIDE	C3604B
4	VALVE DISK	STS 304
5	SPINDLE	STS 304
6	WASHER	STS 304
7	GASKET	LB200
8	VALVE SEAT	P.T.F.E
9	BACK SEAT	P.T.F.E
10	NUT	STS 304
11	WASHER	STS 304
12	STUD BOLT	S45C
13	NUT	S45C
14	SPRING WASHER	SUP6

■ SPECIFICATION

- Application : to prevent back - flowing
- Hydrostatic test pressure : 2.94MPa
- Pneumatic test pressure : 1.96MPa
- Fluid : LPG, NG, NH₃

■ DIMENSION

SIZE	H	L	d	g	C	D	t	f	n-øh
65A	119	292	65	116	140	175	18	2	8-19
80A	129	318	80	132	160	200	20	2	8-23
100A	161	356	100	160	185	225	22	2	8-23

※참고 Remark

1. 암모니아용일 경우 일부 재질을 변경함. _ 1. Material is to be changed in case of NH₃
2. 다른 가스 용도로 사용할 경우 당사료 연락바람. _ 2. Please contact us when applying for other gases