


20KG/CM² FLANGED CHECK VALVE

WCV-2121 (LPG)
WCV-2221 (NH₃)

VALVE & EQUIPMENT DIVISION
VALVE & INSTRUMENTS

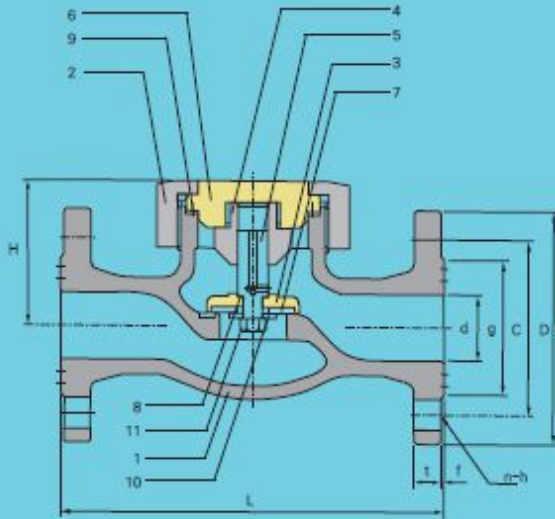

MATERIAL

NO.	PART NAME	MATERIAL
1	BODY	GCD-S
2	GLAND NUT	S45C
3	VALVE DISK	STS 304
4	GUIDE	C3604B
5	SPINDLE	STS 304
6	CAP	SS41
7	VALVE SEAT	P.T.F.E
8	BACK SEAT	P.T.F.E
9	GASKET	NBR O-RING
10	WASHER	STS 304
11	NYLON NUT	STS 304

SPECIFICATION

- Application : to prevent back - flowing
- Hydrostatic test pressure : 2.94MPa
- Pneumatic test pressure : 1.96MPa
- Fluid : LPG, NG, NH₃

DIMENSION

SIZE	H	L	d	g	C	D	t	f	n-øh
25A	71	203	25	67	90	125	15	1	4-15
40A	87	229	40	81	105	140	16	2	4-19
50A	100	267	50	96	120	155	16	2	8-19

※참고_Remark

1. 암모니아용일 경우 일부 재질을 변경함. _ 1. Material is to be changed in case of NH₃
2. 다른 가스 용도로 사용할 경우 당사로 연락바람. _ 2. Please contact us when applying for other gases