


20KG/CM² FLANGED GLOBE VALVE

WGV-1122 (LPG)
WGV-1222 (NH₃)

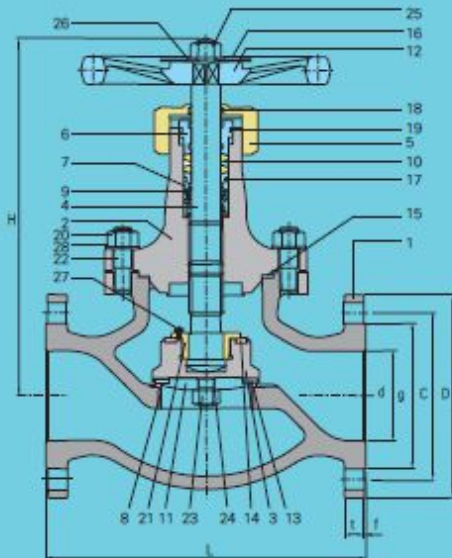

MATERIAL

NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL
1	BODY	GCD-S	15	GASKET	LB200
2	BONNET	GCD-S	16	NAME PLATE	AL
3	VALVE DISK	S20C	17	O-RING	N.B.R
4	SPINDLE	STS 304	18	O-RING	N.B.R
5	GLAND NUT	GCD-S	19	O-RING	N.B.R
6	GLAND	C3604B	20	NUT	N.B.R
7	PACKING GLAND	C3604B	21	DISK STEM RING	S25C
8	SEAT RING	STS 304	22	STUD BOLT	SS41
9	SPRING	STS 304	23	NUT	S25C
10	PACKING	P.T.F.E	24	SPRING WASHER	STS 304
11	WASHER	STS 304	25	NUT	S25C
12	HANDLE	GCD-S	26	SPRING WASHER	SUP 6
13	VALVE SEAT	P.T.F.E	27	WRENCH BOLT	SCM 415
14	BACK SEAT	P.T.F.E	28	SPRING WASHER	SUP6

SPECIFICATION

- hydrostatic test pressure : 2.94MPa
- pneumatic test pressure : 1.96MPa
- Fluid : LPG, NG, NH₃

DIMENSION

SIZE	H	L	d	g	C	D	t	f	n-øh	Lift
65A	272	292	65	116	140	175	18	2	8-19	22
80A	311	318	80	132	160	200	20	2	8-23	26
100A	400	356	100	160	185	225	22	2	8-23	43

unit : mm

참고 Remark

1. 암모니아용일 경우 일부 재질을 변경함. _ 1. Material is to be changed in case of NH₃
2. 다른 가스 용도로 사용할 경우 당사로 연락바람. _ 2. Please contact us when applying for other gases